
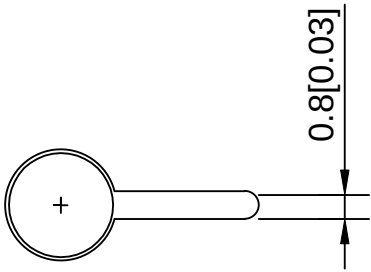



SNS-SHOCK features

- Voltage: < 12V
- Current: < 20mA
- Conduction time: 2ms
- Closed circuit resistance: < 30m ohm
- Open circuit resistance: > 10m ohm
- High temperature resistance: 240 degrees
- Terminal tension: 500gf / min
- Humidity: 95RH 40 degrees 96 hours
- Operating life: 200000 times

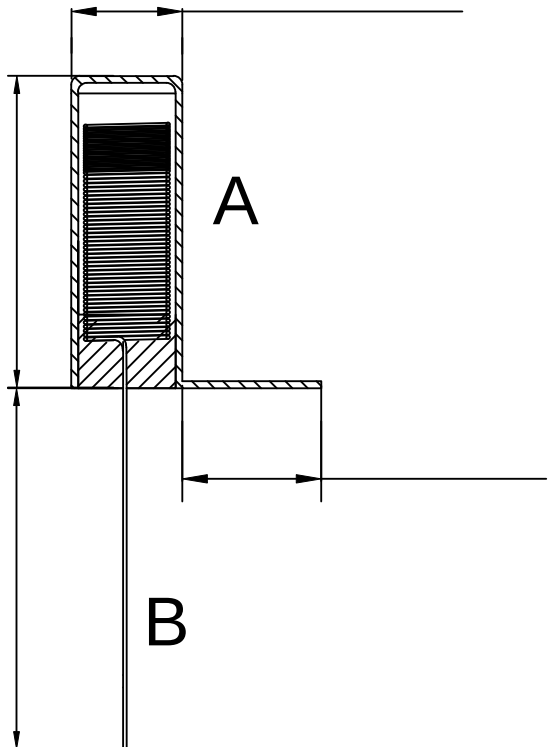

		1			
	Coat the brass	1	Brass	NICKE	
	sealing rubber	1	Rohs epoxy resin		
	spring B	1	SUS	0.1	
	body A	1	Brass	silver plating	
ITEM	PAPT NAMF	QTY	MATERIAL	FINISHING	REMARK

					units: mm	DSND		DATE		SCALE: N/A	MODEL TYPE: Vibration switch
ΔX					tolerance:	DWN		DATE		VIEW:	PART NO.:
ΔX						CHKD		DATE		UNIT: mm/in	DWG NO.:
ΔX						APPD		DATE		SIZE: A4	SNS-SHOCK
MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES				WEIGHT	SHEET	REVISION
	REVISIONS								1.0g	1/1	A0